

BLUEBERRY *iS* UHF

RFID in your pocket



RFID reader and writer


USB interface - Bluetooth 2.1+ EDR

iAP and SPP profiles

Reading of EPC, TID and User Memory

Output ASCII / HEX with prefix and suffix

Battery life up to 10000 readings

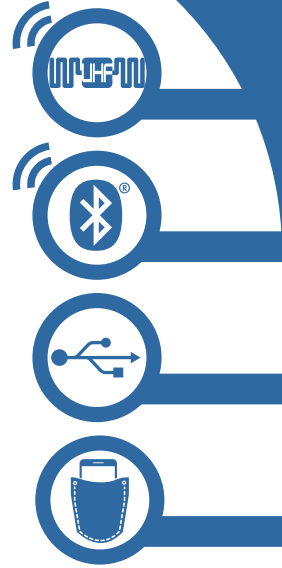

Made for iPhone 5, iPhone 4S, iPhone 4, iPhone 3GS, iPad (4th generation), iPad (3rd generation), iPad 2, iPad, iPad mini

BlueBerry iS UHF is an RFID key fob reader capable of reading an UHF RFID tag and transmit it via Bluetooth® to any device equipped with that interface. With the push of a single button, this easy-to-use device allows the reading and transmission of RFID tag data to a mobile device.

The device has a reading distance of 30 cm with tag far field and 2 cm with tag near field (depending on the used tag).



BlueBerry iS UHF is an RFID reader / writer that configured with iAP (iPod Accessory Protocol) Bluetooth profile, provides a bi-directional communication with iPhone® and iPad®.

In the same time BlueBerry is an easy way to integrate the RFID communication system on fixed devices that are equipped with operative system as Windows, Linux, Mac OS.











The single communication protocol, integrated in all TERTIUM Technology products, makes it easier to develop and project an application software able to manage all the functionalities of the devices. The configuration software allows to set the major functionalities, for example the auto-scanning mode or the simultaneous reading of EPC+TID+User Memory.

All high-level operations such as information processing, visual display, transmission via text message, e-mail or directly on server via GPRS are devolved to the device BlueBerry will interface with.

Additionally, BlueBerry iS UHF can operate as a normal table RFID reader by simply connecting it to a PC via a USB cable.





	MAN/MACHINE INT	1 function key for RFID read activation, Multitone Beeper, 2 LED for device operation signaling
	INTERNAL DEVICES	<p>RFID reader ETSI version: frequency: 865.6 – 867.6 MHz number of channels: single or 4 hopping channels Channel occupancy in accordance with: ETSI EN 302 208-2 V1.4.1 and ETSI EN 300 328 V1.8.1 power: 50 mW standard: EPC Class1 Gen2 read range: up to 30 cm with Far Field Tag, 2 cm with Near Field Tag (*)</p> <p>RFID reader FCC version: frequency: 902.55 – 927.7 MHz number of channels: 50 hopping channels (compliant to FCC part 15) channel occupancy: in accordance with FCC part 15 power: 50 mW standard: EPC Class1 Gen2 read range: up to 30 cm with Far Field Tag, 2 cm with Near Field Tag (*)</p> <p>Embedded antenna</p>
	INTERFACES	Micro USB type B, Bluetooth Class 2 V2.1+ EDR
	OS COMPATIBILITY	iOS, Android, RIM, Windows Mobile/Phone, Windows, OSX, Linux
	PROCESSOR	Texas Instruments MSP430 (16 bit RISC a 16MHz)
	POWER SUPPLY	<p>USB powered: 380mA peak @ 5Vdc (RF active full power), 30mA @ 5Vdc (idle mode)</p> <p>Battery powered: Li-Poly Battery 3.7Vdc 300mAh, rechargeable via micro USB Battery life 10000 reading, 14 h in idle mode</p>
	WORKING TEMPERATURE	-20°C / 60°C
	DIMENSION	Width 6.8 cm – Height 4.2 cm – Depth 1.8 cm
	WEIGHT	30 g
	PROTECTION DEGREE	IP 54

(*) depending on the TAG

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license. The Bluetooth trademarks are owned by Bluetooth SIG, Inc.